

**Electric  
Cordless**

# Re-bar Cutters



This can cut **dia. 16mm (5/8")** Re-bar

**Electric**

## TC16-120V / TC16-230V

## Electric Re-bar Cutter (Hydraulic function)

Cutting Speed : 4seconds



Double insulation

Size : 420mm(W) X 104mm(D) X 216mm(H)

### Accessories

**Spare Blade Set**  
Item No. TCCJ-16



Carry Case



**Bolt Cutter**  
Hand held 350mm 1pce



Shoulder Strap

### Spare Products

Product Name	Item No.	Weight
Spare Blade set	TCCJ-16	0.2kg

**Cordless**

## TC16-MH120 / TC16-MH230

## Cordless Re-bar Cutters (Hydraulic function)

Cutting Speed : 7seconds

Battery Output:14.4V



TC16-MH120/  
TC16-MH230

Size : 340mm(W) X 90mm(D) X 330mm(H)

### Accessories

Carry Case



**Nickel-Metal Hydride Battery (Ni-MH)**  
DC14.4V  
3000mAh



**Battery charger**  
AC120V(TC16-MH120)



**Battery charger**  
AC230V(TC16-MH230)



**Spare Blade Set**  
Item No. TCCJ-16




Shoulder Strap

### Spare Products

Product Name	Item No.	Weight
Spare Blade set	TCCJ-16	0.2kg
Nickel-Metal Hydride Battery	EB1430R	0.8kg
Battery charger [120V]	UC18YRL	0.7kg
Battery charger [230V]	UC24YC	1.1kg

### With fully charged battery cuts

	TC16-MH120 / TC16-MH230
Dia.16mm(5/8") re-bar	80 times
Dia.13mm(1/2") re-bar	125 times

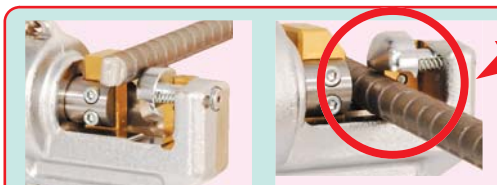

### Stability insured!! (PAT.P)

New attachment surely prevent wrong angle against rebar and blade. This function will surely avoid any accident, trouble that are occurring from wrong angle of cutting material.

◆Head turns around : Head turns 180 degrees in 45 degrees steps.

**Electric**

**Cordless**

Item No.	Electrical input	Electricity	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
TC16-120V	AC120V	7.0A	16 (5/8")	6.7kg	13kg	0.056
TC16-230V	AC230V	3.6A				
Item No.	Battery / Electrical input	Charging time	Cutting Capacity dia. mm (inch)	Weight	Packing weight	M 3
TC16-MH120	14.4V 3000mAh(Ni-MH) / AC120V	45 minutes	16 (5/8")	5.8kg	9.7kg	0.063
TC16-MH230	14.4V 3000mAh(Ni-MH) / AC230V	37 minutes				